

SUBMITTAL AVI-75 TYPE B

Job _____
 Location _____
 Submitted to _____
 Submittal Prepared by _____
 Approve Date _____
 Date _____

UL Classified - 1½ Hour Rating, Static
 For use in installations rated less than 3 hours

Standard Profile (4¼") 22 Ga

Type B Damper
 Blades out of air-stream

Available for vertical and horizontal installations



Standard fusible link - 165° F (optional 212° F)

Available in stainless steel

Vertical dampers are available in single-section sizes
 from 4" x 3" to 60" x 54"
 multi-section sizes to 120" x 114"

Horizontal dampers are available in single-section sizes
 from 4" x 3" to 40" x 54"
 multi-section sizes to 120" x 108"

Optional 22 Ga Sleeve available:
 8", 12", 17", 20", or 24" lengths (12" is standard)

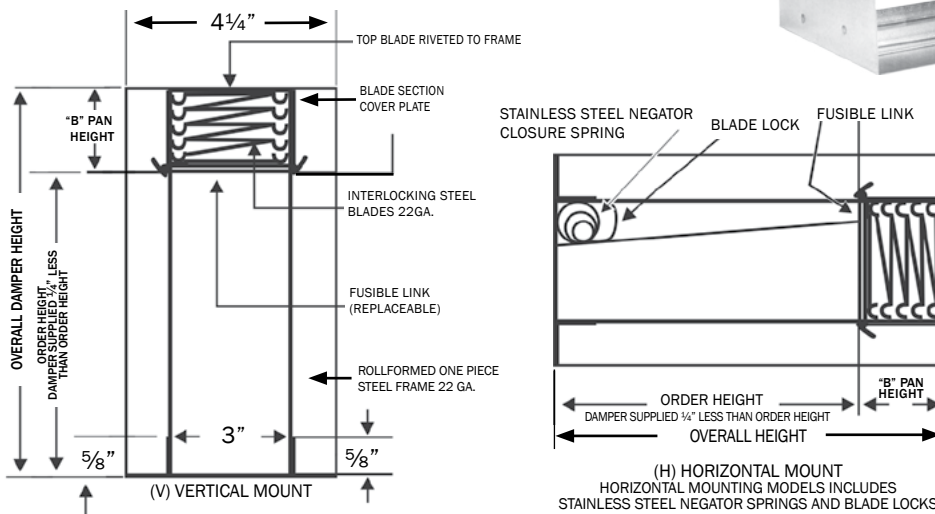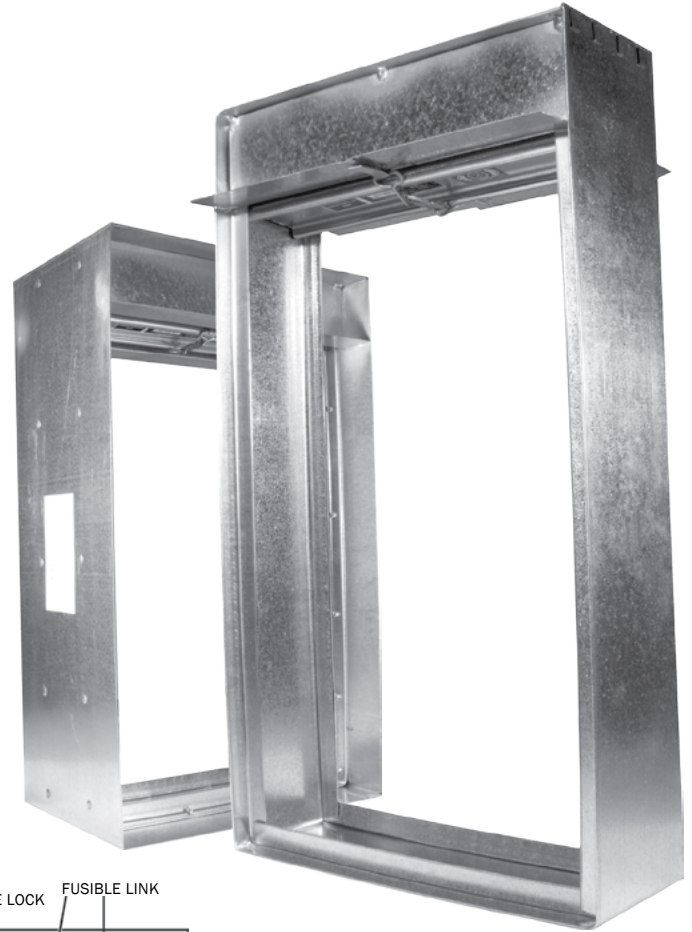

UNDERWRITERS 'LABORATORIES (ULS55C)
 CLASSIFIED CEIUNG RADIATION DAWPERS
 FIRE RESISTENCE RATED 3 HOURS.
 FOR USE IN UL CLASSIF'IED BUILDING
 WATERIALS RATED 3 HOURS OR LESS.

Qty.	Mount	Damper Size		Fusible Link Temp (165 °F) std.	Factory Sleeve Length
	(V) vertical (H) horizontal	W	H		

Part Number Format

