



120 Orenda Rd, Brampton, ON L6W 1W2

905-450-2272

csr@airvacind.com

905-455-3562

www.airvacind.com

# AVI - 50 With Box

S  
C  
E  
P  
S

UL Classified - For use in UL 263 wood truss floor/ceiling assemblies rated 1hour

Approved UL **L-587** designs

Incorporates UL 555C evaluated ceiling damper


22 Ga CRD frame and blades

Factory installed 26 Ga box  
Collar by others (field cut and installed)

Standard fusible link - 165° F (optional 212° F)

Ceramic Thermal Blanket provided on units with CRD blade areas of greater than 84 sq. in.

Available in single-section sizes from 4" x 8" to 14" x 14"

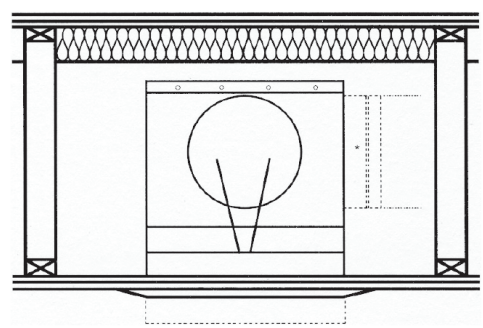

This product meets the requirements for fire dampers established by:

**UL Standards 555**  
**NFPA Standard 90A**  
**ICC Building Codes**

Qty.	Damper Size		Box Height	Fusible Link Temp (165°F) std.	Flange Configuration		
	W	H			F	F1	N

## Part Number Format

**5 0 E A X 0 6 1 0 G 7 F**

**MODEL**

50 SERIES - CRD, RECTANGULAR, 3 HR

**METHOD OF LINK ATTACHMENT**

EAX - (CRD) EASY ACCESS LINK, IN METAL BOX

DAMPER  
WIDTH

DAMPER  
HEIGHT

BOX HEIGHT

7 - 17"  
4 - 14"  
2 - 12"

**MATERIAL & LINK TEMP.**

G - GALVANIZED, W/165° LINK  
H - GALVANIZED, W/212° LINK

F - 5/8" FLANGE  
F1 - 1" FLANGE

